Viper Touch Broiler - Production User Manual





1 Declaration of Conformity

Manufacturer: SKOV A/S

Address: Hedelund 4, DK-7870 Roslev, Denmark

Telephone: +45 72 17 55 55

This declaration of conformity is issued under the sole responsibility of the manufacturer.

Product: Viper Touch series

Type, model: Controller

EU directives: 2011/65/EU RoHS Directive

2014/30/EU Electromagnetic Compatibility (EMC)

2014/35/EU Low Voltage Directive (LVD)

Standards: EN 63000:2018

EN 61000-6-2:2019 EN 61000-6-4:2019 EN 62368-1:2024

We declare as manufacturer that the products meet the requirements of the listed directives and standards.

Location: Hedelund 4, DK-7870 Roslev

Date: 2024.11.01

Tommy Bak

CTO



Product and Documentation Changes

Big Dutchman reserves the right to change this document and the product herein described without further notice. In case of doubt, please contact Big Dutchman.

The date of change appears from the front and back pages.

Note

- All rights belong to Big Dutchman. No part of this manual may be reproduced in any manner whatsoever without the expressed written permission of Big Dutchman in each case.
- All reasonable efforts have been made to ensure the accuracy of the information contained in this manual.
 Should any mistakes or imprecise information occur in spite of this, Big Dutchman would appreciate being notified thereof.
- · Copyright by Big Dutchman.

1	Declaration	of Conformity	3
2	Guidelines		7
3	Product des	scription	8
4	Operating i	nstructions	11
	4.1 4.1.1 4.1.2 4.1.3	Operation Selection of language Information card Search in menus	12 12
	4.2	Operation – for broilers	14
	4.3	Report	15
	4.4	²⁾⁾⁾ Auxiliary	
	4.5	Activity log	
	4.6	Menu button	
	4.6.1	Pause functions	
	4.6.2	Strategy	21
	4.6.2.1	Setting curves	
	4.6.3 4.6.3.1	System	23 23
	4.6.3.1.1 4.6.3.2	Password	
	4.6.3.2.1	Stopping an alarm signal	26
	4.6.3.2.2 4.6.3.2.3	Power failure alarm	
5			
	5.1	Batch	
	5.2	Weight	29
	5.2.1	Search limits	
	5.2.2 5.2.3	Correction factor (only broilers)	
		·	
	5.3 5.3.1	Feed	
	5.3.2	Feed consumption	
	5.3.2.1	Manual distribution of feed before start	
	5.3.3	Naming of feed type	
	5.3.4	Feed control	
	5.3.4.1 5.3.4.2	Feed programsFeed control - pan feeding	
	5.3.4.2.1	Time-controlled pan feeding	
	5.3.4.2.2	Time and amount controlled pan feeding.	
	5.3.4.2.3	Time and amount controlled pan feeding with distribution	
	5.3.4.3	Feed control – chain feeding	
	5.3.4.3.1	Time-controlled chain feeding	
	5.3.4.4 5.3.5	Feed mixture	
		· · · · · · · · · · · · · · · · · · ·	
	5.4 5.4.1	Water	
	-		
	5.5	Light program	
	5.5.1 5.5.2	Light program	
		Dawn and dusk	
	5.5.3	Dawn and dusk	47



Viper Touch

	5.5.4	Reducing main light	
	5.5.5	Flexible light settings	
	5.5.6	Slave light	
	5.5.7	Extra light	
	5.5.8	Inspection light	50
	5.6	Silo	52
	5.6.1	Change to different silo	
	5.6.2	Shared silo	54
	5.6.3	Day silo – feed weighing	56
	5.6.3.1	Filling of day silo	56
	5.7	24-hour clock	57
6	Alarm setti	ings	58
	6.1	Production	58
	6.1.1	Light alarms	
	6.1.2	Feed alarms	
	6.1.3	Water alarms	
	6.1.4	EggScan - egg counter	
	6.2	Master/Client alarms	63
7	Maintenan	ce instructions	64
	7.1	Cleaning	64
	7.2	Recycling/Disposal	64



2 Guidelines


This user manual deals with the daily operation of the controller. The manual provides fundamental knowledge about the functions of the controller that is required to ensure optimum use of it.

The user manual only describes the production functions of the controller. You will find a general description of the operation and the climate functions of the controller in the appurtenant user manual.

If a function is not used, e.g., **24-hour clock**, it is not shown in the controller user menus. The manual may therefore contain sections that are not relevant to the specific setup of your controller. See also *Technical Manual* or contact service or your dealer, if required.

10" and 7" controller display

The displays shown in this manual are from a 10" controller display where the menu overview is shown to the left in the display. If you use a controller with a 7" display, the menus are shown in the middle of the display.

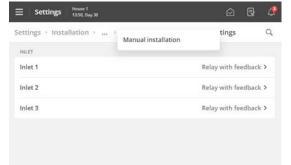

Using a 7" display you can press the menu headlines at the top of the display to go back step-by-step in the menus.

If more steps are available that what can be shown, you can press the 3 dots and select a menu from the appearing list.

3 Product description

Viper Touch is a series of one-house controllers specifically designed for poultry houses. The controller series includes several variants. Each of them meets the different requirements for climate and production control in connection with the production forms and geographical climatic conditions.

The controller is operated via a large touch display with graphical views of the ventilation status, icons and curves, among other things. The pages shown on the display are adapted to the different variants where the most relevant functions are easily accessible.

A wide range of functions such as 24-hour clock, light, water meter, and auxiliary sensor can be named by the user to suit the individual house and functions can be easily recognized in menus and alarms.

The controller has 2 LAN ports for connection to BigFarmNet Manager and also 2 USB ports.

Viper Touch Profi can regulate and monitor the climate and provides complete two-zone control that can regulate temperature, humidity, ventilation, cooling, humidification, and CO2 ventilation in 2 separate zones.

Viper Touch Profi is available in combination with different production variants:

- Broiler
- Breeder
- Layer

The controller has 6 main pages, which are adapted to poultry production and a menu page. The pages contain selected functions and views relevant to the daily work.

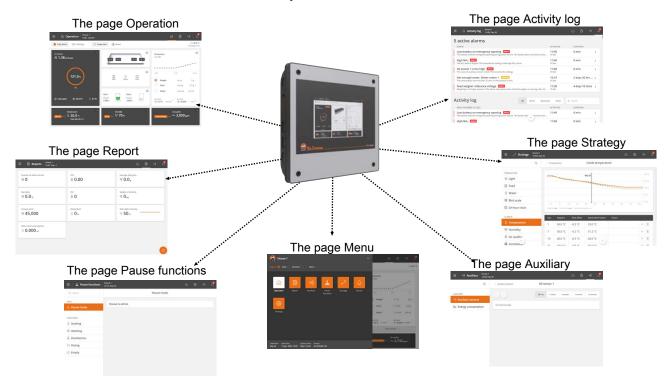


Figure 1: In addition, by selecting the different elements of the pages, there is access to underlying functions and data from the front pages.



The page Operation


The page is the main page view where the functions that must be used for daily operation are gathered.



The page **Report**

The page can be set up according the user's wishes to contain cards with key values showing current data.

It can thus be used to collect values that must be read daily and collect data to be reported.



The page Activity log

The page displays a log of all recorded alarms, operations of the controller and events.



Menu button


The button gives access to language selection and to a collection of shortcuts to the various pages.





The page gives access to functions designed partly to facilitate the activities you must carry out in the house to clean it and prepare it for the next batch and partly to ensure the air change and temperature in the house while it is empty.







The page gives access to determination of the desired production strategy, which must be repeated from batch to batch.

These are, for example, program settings, references, and batch curves.





The page provides access to general settings and alarm limits.



The page Auxiliary

The page gives access to graphical displays of historical data from various types of additional equipment (auxiliary sensors and energy meters).

The page is only displayed if additional equipment is installed.

4 Operating instructions

4.1 Operation

Each page is composed by different types of cards that provide information about the operation and quick access to operation.




From the top bar of the page, there are shortcut buttons that allow you to switch between the main pages **Operation** (**C**), **Report** (**D**), **Auxiliary** (**E**) and **Activity log** (**F**).

- A The icon and name of the page.
- **B** The house name, time, and possibly week and day number.
- **C** The **Operation** page provides an overview and the ability to operate the functions most needed for your daily work.
- **D** The **Reports** page shows the key values the user wants on the page.
- E The **Auxiliary** page displays the consumption figures and auxiliary equipment status (if installed).
- **F** The **Activity log** page displays active alarms and a complete log of operations, events, and alarms.
- G The menu button gives access to language selection (see section Selection of language [▶ 12]) and other pages: Pause functions, Strategy and Setting.




For additional operating instructions for the general functions of the controller, see the user manual for the climate controller.

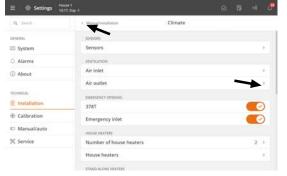

Navigation menus provide access to sub-menus.

- The right arrow displays a sub-menu.
- The left arrow in the upper left corner allows you to take one step back in the menu.

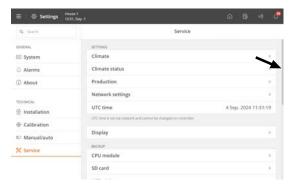

Scroll

If the page is higher or wider than the display, you can scroll.

This is shown in the display as scroll bar.


Scroll by sliding your finger over the display.

7" Display

This is shown in the display as arrows or scroll bar.

Scroll by pressing the arrows or letting your finger slide across the display.

4.1.1 Selection of language

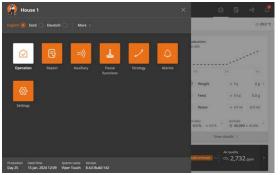

Press the Menu button.

A dot indicates the selected language.

Press More if the requested language is not displayed.



Select the language from the list. Press **Confirm**.

Note that function names (such as 24-hour clocks, water meters, and programs the user can name) are not translated into the selected language.

The factory setting for the names is English.

4.1.2 Information card

The information card is meant to give the daily user a better understanding of how the controller is working right now.



The information is available on pages with the icon





Press to view more details.


The following is described for selected control areas:

- · The current status.
- The reason for the current adjustment.
- · What the next step in adjustment will be.

4.1.3 Search in menus


It is easy to search for the individual functions of the controller. There are search fields on the pages: **Auxiliary, Pause functions, Strategy,** and **Settings**.

A search across the pages is performed.

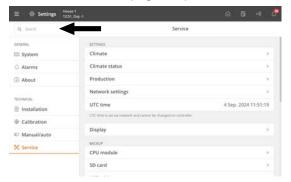

Use the search field to the left to search in menus.

Enter at least 3 characters to search.

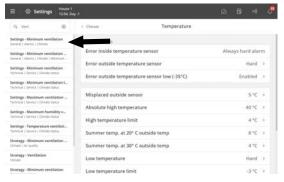


The result is shown below the search field. The path for the individual menus is also shown, for example, under Settings: **General | Alarms | Climate**.

Press a search result to go directly to that menu.

Press the X in the search field to remove the search results again.

4.2 Operation – for broilers

The page has been adapted for broiler production. It contains views and settings relevant to the daily work of a broiler house.

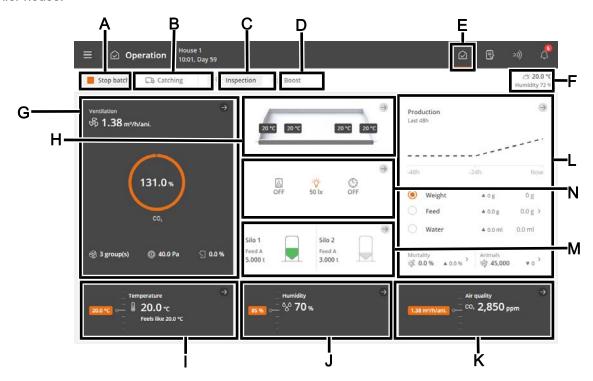

- A The function button **Stop batch/Start batch**. See the section House status Active house Empty house.
- B The function button **Catching function**. The function is designed to alter the air change in the house in connection with all or some animals leaving the house. See the section Catching.
- C The function button **Inspection** for manually activating the inspection light.
- **D** The function button **Boost** to manually activate boost. The function improves air quality by briefly increasing ventilation. See the section Ventilation boost.
- E Shortcut to the main page Operation.
- **F** View of outside temperature and outside humidity.
- **G** Status view for climate control and access to the climate equipment menus and house card setup.

The status view also provides a shortcut for manual control of the climate equipment. This is intended for situations where equipment must be stopped.

H The house card displays values for climate sensors and climate equipment. The values are displayed as whole numbers. In case of an error, a line appears instead and the value changes color to red.

The house card provides access to status displays for climate control, menus for climate equipment, and house card configuration.

- I Temperature settings. See the section Temperature.
- J Humidity settings. See the section Humidity.
- **K** The ventilation functions CO₂ and NH₃. See section CO2 and NH3.
- View of the development of key figures for animal weight, feed, and water consumption during the past 2 days. In addition, the view of calculated mortality and the current number of animals and shortcuts for recording the number of animals, the number of dead and moved animals.


The view also provides a shortcut to details with information and settings options.

M Status view for silo content. The views provide a shortcut to recording of feed supplies and settings options for silo.

N Status view for climate and production functions controlled by time programs. The view provide an overview of all programs and appurtenant settings, and for status and settings for production equipment.

4.3 Report

The user can set up the page to include the key values that give the desired overview of climate and production values.

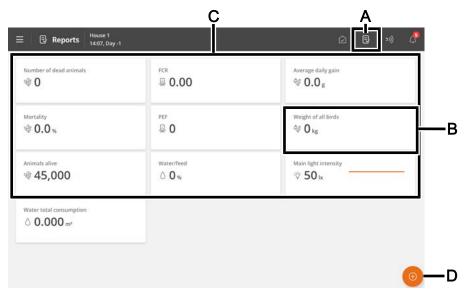

- A Shortcut to the **Reports** page.
- **B** Card with the key value. Each card can be set up to include up to 3 key values.
- C The page displays a series of cards with selected key values for, for example, history and current values
- **D** Edit button. Gives access to choose between the desired key values.



- **E** Tools for editing headlines or content on cards and moving or deleting cards.
 - First, press a tool and then make the desired change.
- **F** Column header.
 - Press to name.

G Card with the key value.


Press to change the key value and set up its view.

H Tool for adding a new card in the column.

Press to add a card and select the desired key value.

Cards with several key values

You can merge several cards to view up to 3 key values in one card.

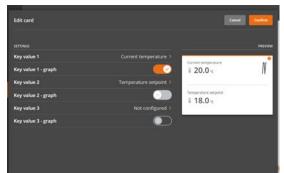

Press the editing tool 3.

Press on the key value to be changed.


Select Key value 2 and select the key value to be displayed.

Select Key value 3, if required and select the key value to be displayed.

To the right a preview of the card is shown.

4.4 Mariliary

The page provides access to recordings from different types of equipment (auxiliary sensors and energy meters), which can be used for monitoring, as an example.

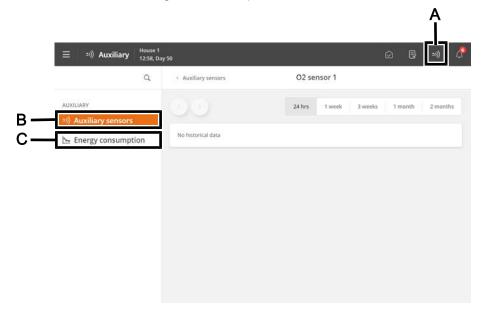

- A Shortcut to the page **Auxiliary**.
- B The **Auxiliary sensors** menu provides an overview of the controller recordings supplied by the auxiliary sensors in a graphical view.

The auxiliary sensors do not influence the regulation.

The controller records the content of CO_2 , NH_3 , O2 in the air as well as humidity, pressure, and temperature. You can also connect air velocity and wind direction sensors that can measure the wind direction and wind velocity outside the house.

The values measured by each sensor are viewed in intervals of 24 hours to 2 months.


The menu **Energy consumption** shows the current consumption in W and total consumption in kWh. The menu content depends on the type and the setup of the controller.

4.5 Activity log

The page displays a log of all recorded alarms, operations, and events.

Alarm status colors:

- Red hard active alarm
- Yellow soft active alarm (warning)
- · Gray deactivated alarm

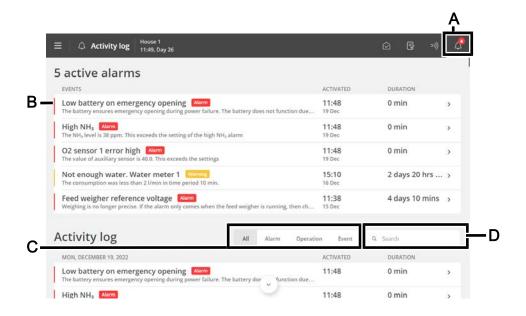

A Shortcut to the page **Activity log**.

The icon for the Activity log indicates the number of active alarms as long as an alarm situation has not ceased.

B Each line shows an activity.

Press the activity line to see details, such as when an alarm was activated and acknowledged. Also, when a value/setting was changed.

Press **Close** to close the details screen again.

C Filtering options for the various types of activities:

All: shows all types **Alarm**: shows alarms

Operation: shows the operation of the controller **Event**: shows, for example, reset of the controller

D Search the field for the activity log.

Enter at least 3 characters to search. It is also possible to combine filtering and search.


Several alarms often follow each other because one defective function also affects other functions. For instance, a flap alarm can be followed by a temperature alarm as the controller cannot adjust the temperature correctly with a defective flap. Thus, the previous alarms allow you to follow an alarming course back in time to detect the error that caused the alarm.

See the description of alarms in the section Alarms [25].

4.6 Menu button

The menu button gives access to language selection and general settings pages.



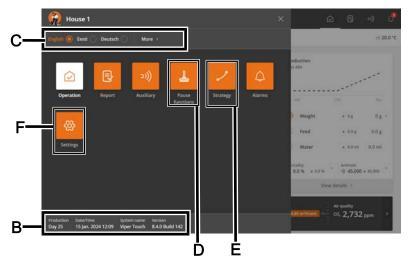

- A Menu button
- **B** Displaying house name, day number, time, week number, if required, variant name, and software version.
- C Select language. Access other languages under More.

Note that function names (such as 24-hour clocks, water meters), and programs the user can name are not translated into the selected language. The factory setting for the names is English.

D Shortcut to the page **Pause functions**.

The page is designed partly to facilitate the activities you must carry out in the house to clean it and partly to ensure the air change and temperature in the house while it is empty.

E Shortcut to the page **Strategy**.

The page provides access to the batch curves, which form the basis for controlling climate and production functions. See also the section Setting curves [≥ 22].

F Shortcut to the page **Settings**.


The page provides access to the user settings for **House info**, **Alarm settings**, and **Password**. See the sections System [\triangleright 23], Alarms [\triangleright 25], and Password [\triangleright 23].

In addition, you have access to the technical menus used for setup and service. See the Technical Manual.

4.6.1 Pause functions

The page gives access to functions designed partly to facilitate the activities you must carry out in the house to clean it and partly to ensure the air change and temperature in the house while it is empty.

- Soaking
- Washing
- Disinfection
- Drying
- Empty

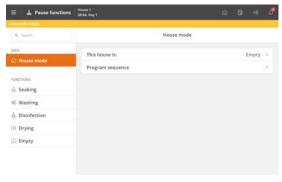

State

The controller can only activate the functions when the house status is **Empty**.

Empty house status is indicated at the top of the page by a colored bar.

When the time of a function is up, the controller will again regulate according to the settings for **Empty**.

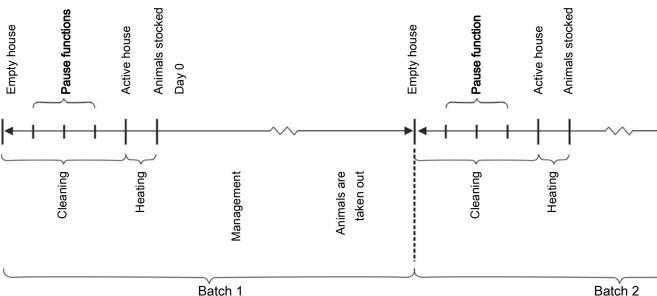


Figure 2: Setup example of Pause functions for batch production


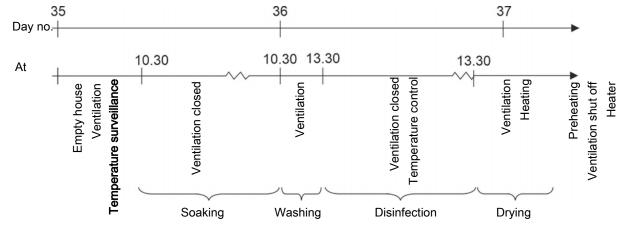


Figure 3: Sequence of functions

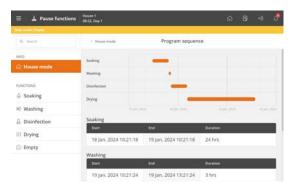

Program sequence

You can set up each function to start at a specified time. It is thus possible to set an entire program sequence for the functions.

Menu button Pause functions Info House mode Program sequence	
This house is:	Function selection menu (only displayed when the house status is Empty).
Function remaining time	When a function is activated, the set time counts down (only displayed when the house status is Empty).
Program sequence	Menu for setting the start time and function duration (only displayed when the house status is Empty).

Also see the section Between batches for a description of the various functions.

4.6.2 Strategy


The page provides access to the more constituent function settings that you typically do not need to change during a batch. The strategies are thus determined in light of the overall requirements for the production.

It is where batch curves for temperature and light are set up, sub-functions such as nozzle cleaning for cooling are selected, and limit value settings are made.

Changes to the strategy curves are grouped here and displayed as User offset.

See the relevant section below for a description of the various functions.

Together with other information, the curve settings form the basis of the controller's calculation of production regulation.

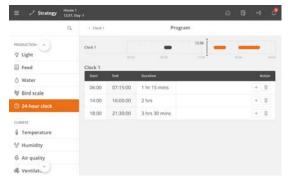

The controller can adjust automatically according to the animals' age.


When the controller is connected to a network with the management program BigFarmNet Manager, curves can also be changed via BigFarmNet.

Depending on the type and setup of the controller, different batch curves are available:

- Feed
- Water
- Weight
- Light

When curves are adjusted via BigFarmNet Manager it appears in the menu.



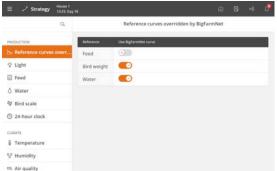

Select if the reference curve from BigFarmNet Manager or the curve from the controller should be used.

4.6.2.1 Setting curves





Set up for each curve:

- A day number for each of the required curve points.
- The desired value of the function for each curve point.

Press to add the required number of curve points.

Typically, the last day number of the batch curve is set to match the expected production time.

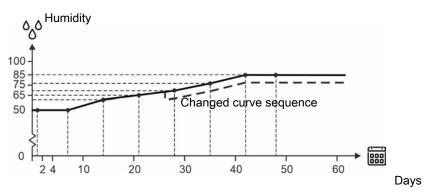


Figure 4: Curve for air humidity

It is generally the case for the curve functions that the controller automatically displaces the rest of a curve sequence in parallel when you change the associated setting during a batch.

4.6.3 Settings

The page provides access to general settings and alarm limits.

4.6.3.1 System

Adjust date and time	Setting current date and time.
	Correct clock setting is important for several control functions and alarm recording. Thus, all controller programs use date, time, and day number.
	The clock will not stop in the event of a power failure.
	Summer and wintertime
	There is no automatic adaptation in summer and winter, as some animal types are very sensitive to changes in their circadian rhythm. If you want the controller to follow the local time for summer and winter, you must manually change the time setting by +/- 1 hour.
Day number	Select whether the day number should show the time since start (house status is active) or the actual age of the animals.
	When the actual age of the animals is required, the day number must be adjusted until it matches the life expectancy.
	At midnight, day number 1 counts for every day that passes.
	Please note that if the day number is changed during a batch, it will shift/destroy the historical data of the batch (feed consumption, etc.).
	The function Day number can also be used to preheat the house by setting a number of minus days.
Week day	Viewing week day.
Start on day	Setting the day on which the batch shall start.
	Day number can be set as low as -3 so the controller can control the preheating of the house before the animals are stocked.
House name	Setting house name.
	Each livestock house must have a unique name when the controller is integrated with a LAN network. The house name is transferred through the network, and the livestock house should be identifiable based on the name.
	Set up a plan for naming all controllers connected to the network.
Password	Decide whether the controller must be protected against unauthorized operation us ing passwords.
	See section Password [▶ 23].

4.6.3.1.1 Password

This section is only relevant to houses where the Password function is activated.

The controller can be protected against unauthorized operation using passwords.


In order to have access to changing a setting, a password must be entered that corresponds to the user level which the relevant function is found at (**Daily**, **Advanced** and **Service**).



Menu button | Settings | General | System | Password to access the activation of the function.

Enter a service password.

After entering the password, the controller can be operated at the corresponding user level. After 10 minutes without operation, the user is automatically logged out.

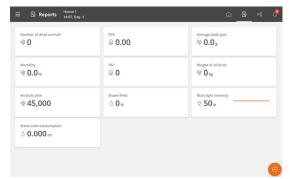

Select a page after an operation. After 1 minute, the controller will request the password again.



Activate the function **Use password for the Technical menu only** to make the controller require the **Service** password only when the user wants to change settings in the menus **Installation**, **Calibration**, and **Service**.

Change password for each of the 3 user levels.

To gain access to changing a password a valid password must first be entered.



User level	Gives access to	Factory-set code
Daily view	Entering the number of animals	
(without login)	Fine-tuning of temperature, humidity, and air quality	
	Manual climate control	
Daily	Daily:	1111
	Changing set values	
Advanced	Daily + advanced:	2222
	Changing curves and alarm settings	
	Manual production control	
Service	Daily + advanced + service:	3333
	Changing settings under Technical menu	



Access limitation to operate the controller

We recommend that you change the default passwords and subsequently change the password regularly.

Forgotten Password

If an incorrect password is entered 3 times, the controller will display its MAC address and UTC date.

These must be provided by contacting a Service Partner who can assist with a new temporary Service Password. The password is specific to the individual controller and only valid on the day it is generated.

4.6.3.2 Alarms



Alarms only work when the status is Active house.

The only exceptions are alarm tests and alarms for CAN communication and temperature surveillance at **Empty**.



The controller will record the alarm type and time when an alarm occurs.

The information on the type of alarm will appear in a separate alarm window, together with a short description of the alarm situation.

Red: hard alarm Yellow: soft alarm


Gray: deactivated alarm (alarm state ceased)



You can choose whether the alarm should be hard or soft for selected climate and production alarms.

Hard alarm: Red alarm pop-ups on the controller and generation through the connected alarm units, e.g., a horn. Only hard alarms trigger the alarm relay.

Soft alarm: Yellow pop-up alert on the controller. Soft alarms generate a pop-up in the display.

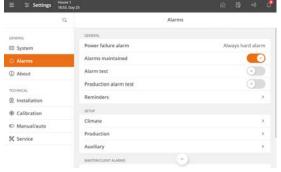


The controller will also trigger an alarm signal, which you can choose to maintain.

The alarm signal will thus continue to sound until you acknowledge the alarm. It also applies even if the situation that triggered the alarm has ceased.



Alarms maintained: Selecting whether the alarm signal should continue after the alarm condition has ceased.

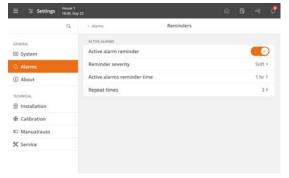

Reminder


The controller can remind you of an ongoing alarm once you have acknowledged a hard alarm. It should ensure that the cause of the alarm is handled.

Reminder settings:

Active alarms reminder time: Setting how long after the alarm, the reminder is to appear.

Repeat times: Setting how many times the reminder is to appear.

See section Climate for setting the alarm and alarm limits.

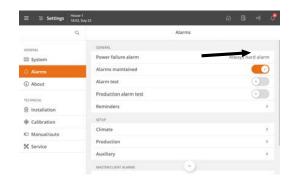

Switch change

When the controller is connected to an override switch module, an alarm is available for changing the module's switch position.

Changes in the switch position are logged in the Aktivitet-sloggen.

4.6.3.2.1 Stopping an alarm signal

The alarm window disappears, and the alarm signal stops when you acknowledge the alarm by pressing **Acknowledge**.

4.6.3.2.2 Power failure alarm

The controller will always generate an alarm and activate emergency opening in the event of power failure.

4.6.3.2.3 Alarm test

Regular alarm tests help to ensure that the alarms actually work when needed. Therefore you should test the alarms every week.



Activate Alarm test to start testing.

Check that the alarm lamp is flashing.

Check that the alarm system alarms as intended.

Press Acknowledge to finish testing.

5 Production


It is of particular importance to know the weight of the animals to monitor and control their productivity.

Being able to control animal behavior means providing the right amount of light in the right places at the right time.

Changes in water consumption can indicate disease outbreaks and water loss, increased temperature in the house, or poor feed quality. In the case of a disease outbreak or increased temperature in the house, the animals' water intake will increase.

The production module is adapted to broiler production and enables systematic monitoring and effective control of the production.

- · Continuous monitoring and production control
- · Advanced feed program ensuring an optimum FCR/PEF
- · Light control for good animal welfare
- · Water monitoring and control quick response in the event of irregularities

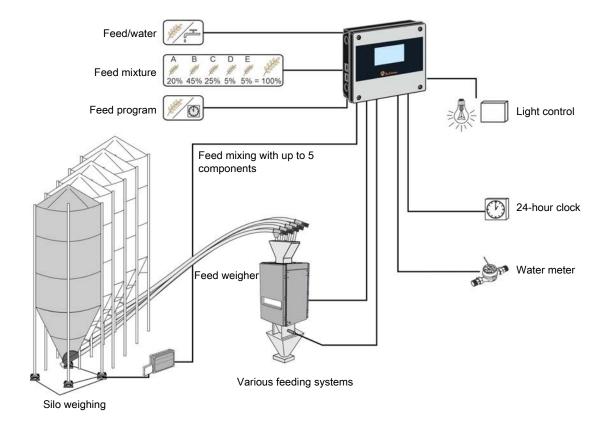

5.1 Batch

Information about the number of stocked and moved animals helps to form the basis for the production controller's calculations relating to production control. Key values, such as mortality and feed/animal, are thus dependent on you entering the correct numbers.

The controller continuously calculates the total number of live animals, the number of dead animals yesterday, and the mortality in the livestock house. You can also register the number of stocked animals at the batch start, reasons for culling, etc.

The controller can display whether the registrations were made in the morning or the evening, and a total number of each type of recording for the batch.

Calculations of previous recordings can be viewed in the PC management program BigFarmNet Manager.



Operation | Production card | W Daily gain

Operation. The most important values and recordings for animals in the livestock house can be viewed and entered via the **Production** card.

A graphic on the face of the card illustrates the current weight, feed, and water values during the last 48 hours. In addition, you can see the actual values for mortality and number of animals in the house and have easy access to record the appurtenant numbers during the batch.

Mortality: entry of the number of dead animals in different categories.

Animal: entry of the number of moved animals.

In the following section, you will see a description of the functions and setting options available for animals.

uction card 🇳 Animal
Entry of the total number of animals at batch start.
If animals are stocked or removed from the house during a batch, you can make the entry via the face of the Production results card or the menu Add/remove (moved) or Culled/dead .
Displays the number of live animals.
Entry of the number of animals removed or stocked in the livestock house in the different categories.

Operation Production	n card 🥸 Mortality		
Culled/dead	Entry of the number of animals in categories, including reasons for culling/death.		
	These numbers are used to calculate the mortality rate.		
Number of dead animals	Display of the total number of dead animals.		
	Here it is also possible to enter a number instead of in the menu Culled/dead ani- mals . The numbers entered here are included in the recordings under Culled/dead animals in the category Dead .		
Number of dead animals today	Display of the total number of dead animals since midnight.		
Number of dead animals yesterday	Display of the total number of dead animals.		
Mortality	Display of the total calculated mortality in percent.		
Livability	Display in percent of the number of live animals compared to the number of stocked animals.		

Bia Dutchman

Dail	v	gain	

Display of the animals' gain the last 24 hours.



FCR Display of the calculated feed conversion (FCR- Feed conversion rate).

It reflects how efficiently the animals convert feed into body weight.

FCR is calculated based on: animal weight and feed consumption.

The lower the FCR, the better the feed conversion.

Operation | Production card | PEF

PEF Display of the calculated feed efficiency factor (PEF- Production Efficiency Fac-

tor).

It is an overall indication of production efficiency.

PEF is calculated based on:

Weight (kg) x (100 – mortality (%))

Age (days) x FCR

The higher the **PEF** value, the better the productivity.

5.2 Weight

To achieve optimum production, it is important that the animals' gain follows the recommendations of the breeding company. Changing the amount of feed or the light control can regulate the gain.

Weighing can be carried out automatically or manually.



Operation. A graphic on the Production results card shows the current average weight for the last 48 hours (14 days for breeder).

The card also provides a shortcut for entering the result of manual weighings.

In the following section, you will see a description of the functions and recording options available for weight.

Automatic weighing

In automatic weighing mode, the controller calculates, among other things, these key values:

- · Coefficient of variance
- Uniformity
- Average
- Gain
- · Distribution of weighings
- · Number of weighings for each bird scale
- · Number of registrations

These values can also be recorded and calculated based on animal groups (for breeders or layers).

\sim				
	-	_	٦,	
	r			٦



Operation | Production | 🌂 Weight | More curves | ...

Distribution of weighings

Display of the distribution of approved weighings over a 24-hour period.

The views are available for the individual bird scale, per animal group and for females and males.

The view is updated by midnight. Press the arrows to access historical data.

When comparing views for several days, please note that the x- and y-axis are dynamic and adapt to the number of weighing data.



Operation | Production | Weight | Bird weight

Gain	Display of the animals' estimated gain in the last 24 hours.
Coefficient of variance	Display of the percentage deviation of the animals in relation to the average weight (column) and display of the normal distribution (curve).
	The higher the standard deviation, the less uniform the animals.
Uniformity	Display of the percentage of animals that are within a limit of +/- 10% of the average weight.
	The higher the percentage, the more uniform the animals.
Number of weighings	Display of the number of weighings in the last 24 hours.
	There should be at least 100 approved weighings per day (weighings within the search limit).
	Too few weighings may be due to:
	- The scale being placed in an area with too few animals and too little activity.
	- The Search limit setting is incorrect.
Number of registrations	Display of the number of stable weighings higher than 25 grams recorded within the last 24 hours.
Average uncorrected	Display of the measured average weight before correction of the correction factor.
Adjusted reference	Display of the expected weight of the animals at the current day number.
weight	It is based on the batch curve values under Strategy . The controller, however, adapts the reference weight to include as many weighings as possible.
Search limit	Setting limit values for sorting out weighing results. Weighing results above or below this limit in relation to the reference are not used. In this way, the weighing results obtained from weighing more than one animal or other types of incorrect weighings shall be eliminated.
	See also the section Search limits [▶ 31].
Correction factor	Setting a correction factor that compensates for the less active and less frequent weighing of heavy animals.
	The controller calculations take into account the different sizes and behavior of the animals.
	The value is set as a batch curve under Strategy .
Period for deactivation of bird scale	Setting a period of time where the animals are not weighed automatically. See also the section Disconnect period [▶ 32].
Bird scale signal	Display of the current weight recorded by the animal scale (not displayed for manual weighing).



We recommend calibrating bird scales at least once per batch. See also the Technical Manual.

Manual weighings

In manual weighing mode, you must enter the animals' average weight in the controller.

The manual weighings should be carried out on the same day and time of the week before feeding to ensure that the weighings are comparable.



Manual weight Without automatic bird scale

Enter the average of your manual weighings. The value forms the basis for the controller calculations.

Weigh the animals manually on day 7, 14, 21, 28, 35, 42 ... or on the same day numbers as used in the controller reference curves (if automatic weighing is applied).

Weigh at least 100 birds or 0.5 % of the batch. Preferably, you should make at least 4 weighings evenly distributed in the house.

Inspection weight With automatic bird scale

The inspection weight can be used as a basis for comparison of the automatic weighings.

Enter the average of your manual weighings.

Weigh the animals manually on day 7, 14, 21, 28, 35, 42 ... or on the same day numbers as used in the reference curves of the controller.

Weigh at least 100 birds or 0.5 % of the batch. Preferably, you should make at least 4 weighings evenly distributed in the house.

5.2.1 Search limits

The controller only approves weighings within the deviation in percentage from the adjusted reference weight.

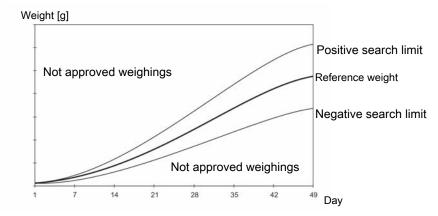


Figure 5: Example of search limit in relation to the reference weight

Day	Reference weight [g]	+/- 15% [g]	Minimum values [g]	Maximum values [g]
1	42	12.6	29.4	54.6
7	162	48.6	113.4	210.6
14	419	125.7	293.3	544.7
21	785	235.5	549.5	1020.5

Day	Reference weight [g]	+/- 15% [g]	Minimum values [g]	Maximum values [g]
28	1223	366.9	856.1	1589.9
35	1794	538.2	1255.8	2332.2
42	2143	642.9	1500.1	2785.9
49	2483	744.9	1738.1	3227.9

Example of calculated, accepted minimum and maximum weighings at a search limit of 15%.

5.2.2 Correction factor (only broilers)

The natural behavior of the broilers results in the heavier broilers not stepping onto the bird scale as often as the lighter broilers. The recordings from the scale might therefore show a weight lower than the broilers' actual weight.

You can set a correction factor, **Correction factor,** to compensate for the weight deviation. By means of the correction factor, the controller corrects the recorded weight, depending on the age of the animals.



The controller factory settings are preset with a correction factor curve, which you can adjust with your observations during the batch.

To set a correction factor, you must calculate how much the recorded weight is lower than the settled slaughter weight (in percent).

Correction factor:	Approx. 104%
Calculation:	2190 / 2110 x 100% = 103.8%
Final weight controller:	2110 g
Slaughter weight:	2190 g

Example of calculation of correction factor based on the factory-set value.

We recommend that the correction factor be adjusted for the current animals.

It can be done by setting the correction factor to 100% for all day numbers and making frequent manual weighings during the first 1 or 2 batches. Compare weight results with the weight reference curve and adjust the correction factor.

Use the slaughter weight from the slaughterhouse as the last curve point.

Be aware of the animals' weight loss during catching, transport, and stay at the slaughterhouse. If possible, ask the slaughterhouse for information about weight loss.

From the last feeding to weighing at the slaughter-house	Weight loss in grams per animal
< 6 hours	0-20
6-8 hours	40-50
8-12 hours	60-70

Table 1: Indicative weight loss figures [g]

5.2.3 Disconnect period

When feeding, the animals eat and drink a lot in a short time; therefore, their weight also increases greatly. For a period after feeding, the weight of the birds is therefore "false."

It is possible to ignore all the weighings in a given period during and after feeding to get a more accurate average weight. The controller will disconnect weighing for the period of time you set.

If you set **Start** and **Stop** at the same time, the weighing will not be interrupted (The factory setting is 00:00).

With the setting **Start** 23:00 and **Stop** 02:00, the weighing is interrupted for 3 hours from one day to the following day.

5.3 Feed

The feed function can be adapted to different types of feeding systems.

Add-on production software can extend functionality to control chain, pan, destination, and layer feeding.

The feed programs and feeding according to reference values enable fully automatic feeding. The feed programs can also be extended with functions such as feed mixture and feed supplements.



Operation. Production shows a graphic of feed consumption.

5.3.1 Handling of feed in the system


At pan feeding, chain feeding, and layer feeding in houses with feed weigher.

To ensure that the final feed consumption is calculated correctly, it is possible to add the feed amount that is already in the system. This can be done by the controller automatically registering and calculating the amount of feed or by manual entry.

In addition to a cross auger sensor, the automatic calculation of the feed amount in the system requires that the function is selected in the installation menu.

At batch start the controller fills the feed system (see section Active house - Empty house).

The amount of feed used for filling is not counted as feed consumption (as the feed has not been consumed but only fills the system).

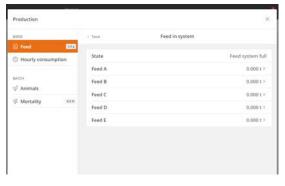

Operation | Production | Feed | Total | Feed in system
Displays whether the feed system is being filled or full.

Ensure that the feeding system is empty when the house switches to **Catching function/Empty house**, so that the animals have eaten all the feed.

The feed in the feeding system is only included in the final calculation of FCR, PEF and feed per animal (in total), when the **Catching function** starts (also at part delivery) or at batch end (**Empty house**).

Automatic calculation:

With cross auger sensor:

At batch start the controller fills the feed system and the cross auger sensor registers when the system is full. The amount of feed that has been fed into the system can be viewed in the menu **Operation | Production | Feed | Total | Feed in system.**

Without cross auger sensor:

At batch start the controller sets the feed system to be full. It is possible to enter the amount of feed you expect to be in the system in the menu **Operation | Production | Feed | Total | Feed in system**.

Manual entry of standard feed amount in the system:


Manual entry can be used if there is no cross auger sensor in the feed system, or if registration of the supplied feed amount is inaccurate and generally do not correspond to the actually supplied amount of feed. This may e.g. be due to the fact that some of the feed is used for laying out in the house before the animals arrive.

The manual entry is made in the menu Installation | Manual installation | Production | Feed control settings | Enter amount of feed in system.

5.3.2 Feed consumption

The controller calculates the feed consumption continuously and updates the consumption as the feed content in the silo is reduced. Consumption for all types of feed is calculated separately.

The controller also displays calculations for feed consumption per animal and water/feed consumption ratio.

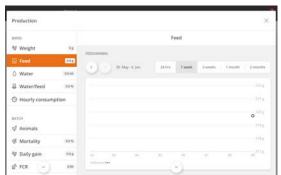



Feed data is collected and presented in graphs and overviews, including key metrics.

It is also possible to enter the weight of feed manually. For example, it may be appropriate to supply feed if there is not enough feed in the silo and feed is provided through other means, or you feed from sacks due to system errors.

Operation Program overview card Manual feed			
Add feed	Enter the weight of feed available in the feeding system.		
	Enter (max. 1000 kg at a time).		
Remove feed	Enter the weight of feed the animals consume.		
	Enter (max. 1000 kg at a time).		
	The controller uses the data entered to make calculations for feed consumption.		

5.3.2.1 Manual distribution of feed before start

In houses with a feed weigher, the controller will fill up the feeding system when you set the house to Active house (see the section House status Active house - Empty house). The amount of feed used for filling is not counted as feed consumption (as the feed has not been consumed but only fills the system).

If you want to manually distribute feed (e.g., on paper) in the house, follow this procedure to ensure that the feed is included in the feed consumption.

- 1. Wait until the first filling procedure is completed.
- Take out the feed from the last hopper with the cross auger sensor.

5.3.3 Naming of feed type

It is possible to name the different feed types to suit the individual house, and they can be recognized in menus and alarms.

Naming is done in the menu Menu button Strategy | Menu button Feed | Feed type names

Please note:

Shared feed weigher and shared silo. Feed type names must be set up for all houses, as the controllers do not share the names.

5.3.4 Feed control

Depending on the type of feed control, the feed can be regulated in terms of time or the amount of feed.

You can change the amount of feed by:

- · Increasing/decreasing the amount of feed per day.
- Changing the day number on which the amount of feed is increased in the feed curve.



Operation. When the feeding is in progress, it is displayed with a colored icon on the card **Program overview**.

The card provides access to view and change the program, which is active on the day number.

5.3.4.1 Feed programs

The time control of feeding is regulated using the feed programs. The feeding follows a fixed program, which determines at what time of day and the maximum length of time to be fed.

The feed programs can contain up to 16 programs starting on different day numbers. A program is maintained from one day number to the next day number. If no programs have a higher day number, the program applies to the rest of the batch.

Set for each day number (up to 16):

- · Number of periods per day
- · Start and stop time

Please note that:

- On the day before day number 1 (Day 0), the feed relay is always switched on. Feeding has therefore been carried out before stocking a new batch in the house.
- The feeding line is off outside the selected periods. However, the cross auger is still able to fill the cross-auger hopper.
- If a start time is set from 00:00 to 24:00, feeding will be carried out for 24 hours.
- · When Status is Empty house, feeding is disconnected.

Feeding via lighting program

There must be an adequate lighting level in the house during feeding so that the animals are active and seek out the feed. The feeding can also be set up to follow the lighting program. See also the section Light [> 45]. The **Feed time program** is not visible if the lighting program regulates the feeding.





Press the field in the column Start to set a start time.

Press the field in the column **End** to set an end time.

Press to add a new period.

The blocks on the timeline show when and for how long feeding is taking place.


Press the **Start day no** field to change the day number on which the program begins, if necessary.

Press the **Add sub program** to create a new program starting with another day number.

Press to delete a period.

5.3.4.2 Feed control - pan feeding

In principle, the feeding system is structured as follows:

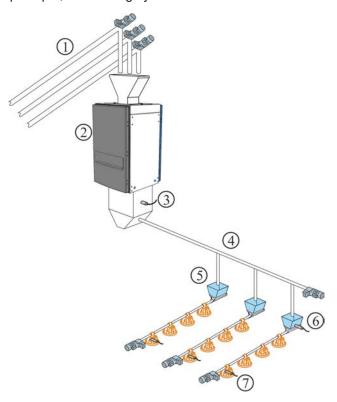

- 1. Silo auger up to five types of feed
- 2. Feed weigher
- 3. Feed demand sensor
- 4. Cross auger
- 5. Cross-auger hopper
- 6. Cross auger sensor in hopper
- 7. Level sensor in control pan


When the installation is carried out, set pan feeding according to one of the following control methods: See also the Technical Manual.

- Time-controlled [▶ 36]
- Time- and amount-controlled [▶ 37]
- Time- and amount-controlled with distribution [▶ 37]

5.3.4.2.1 Time-controlled pan feeding

Feed is dispensed in the time intervals set in the feed program.

A sensor in the cross-auger tank of the last feed line registers whether there is a requirement for feed supply. If so, the cross auger fills up all the tanks during the feeding period. The system stops when the sensor is covered by feed.

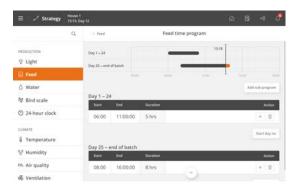

Feed program

Setting the feed program. See the section Feed programs [> 35].

The quantity of feed the animals are expected to eat is determined in a feed reference curve. If the time it takes the animals to eat changes suddenly, it can indicate problems that should be investigated further.

5.3.4.2.2 Time and amount controlled pan feeding

Feed is dispensed in the amount set in the feed reference curve and in the time intervals set in the feed program or the lighting program under **Strategy**.


If the controller is part of a network with the management program BigFarmNet Manager, the reference curves must be set there. An offset value may, however, be set directly at the controller.

The feed program is set as described in the section Feed programs.

Period only with time control

Time and amount controlled feeding can be set to be active only for part of the batch. A start day and an end day indicate in which part of the batch the time and amount controlled feeding applies, respectively. Outside this period, only time controlled feeding is applied according to the feed or lighting program. (is set by pressing the **Menu button | Settings | Installation | Manual installation | Production | Feed control settings | Controlled feeding**).

5.3.4.2.2.1 Feed periods distribution

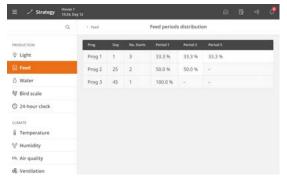



In the feed programs, several daily starts are set for each program.

The desired amount of feed on the day (as indicated in the reference curve) can be divided between the number of starts (periods).

If a period changes, the controller automatically adjusts the successive values. Therefore, make the changes, so they follow the periods' sequence.

5.3.4.2.3 Time and amount controlled pan feeding with distribution

For time and amount controlled feed, the controller calculates whether the amount consumed corresponds to the consumption required. The controller automatically adapts the amount in successive periods if more or less than the required amount has been consumed. See also the section Feed periods distribution [> 37].

Consumption is checked when the animals have finished eating. That is, when the controller no longer records consumption.

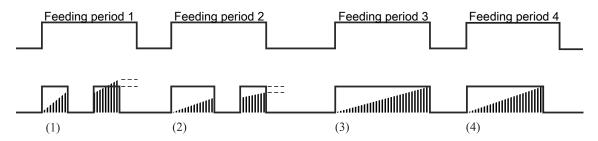


Figure 6: Example of correction of feed consumption over periods.

- (1) Too much feed is deducted from the next feeding period.
- (2) Is stopped by the feed program. Too little feed is transferred to the next feeding period.
- (3) No correction. The feed program stops feeding. The feeding amount is as required.
- (4) Feeding stops before the feeding period ends. The animals have not eaten for a set period (Check consumption when birds full) and have received the required amount of feed.

The controller stops the feeding period if more feed has been allocated than required. An amount corresponding to too much feed allocated compared to the required amount will be deducted from the necessary amount of feed for the next feeding period.

If less than required has been allocated, the controller starts refeeding after a pause.


The controller stops the feeding period if the required amount has now been reached.

If the amount has not been reached, feeding will continue until the required amount of feed has been achieved or the feeding period has ended. If the required feeding amount has not been reached before the end of the feeding period, the lacking amount of feed will be transferred to the next feeding period.

To set up **Controlled feeding**, you press the **Menu button | Settings | Technical | Installation | Manual installation | Production | Feed control settings | Controlled feeding**. See also the Technical Manual.

5.3.4.3 Feed control – chain feeding

In principle, the feeding system is structured as follows:

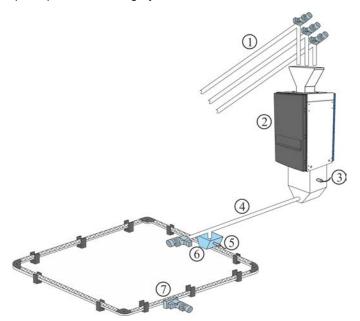

- 1. Silo auger up to five types of feed
- 2. Feed weigher
- 3. Feed demand sensor
- 4. Cross auger
- 5. Feed demand sensor
- 6. Cross auger hopper
- 7. Chain feeding system

When installation is carried out, chain feeding is set to one of the following control methods: See also the Technical Manual.

· Time-controlled

· Control according to light program

Chain feeding controls feeding by supplying feed daily for a number of times during the set periods of time.


5.3.4.3.1 Time-controlled chain feeding



Feed program

Set the feeding periods. Also, see Feed programs [▶ 35].

The menu **Feed program** is not visible if chain feeding is controlled according to the lighting program.

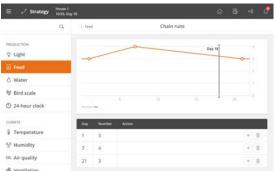

Chain runs

Menu button | Strategy | Feed | Chain runs
Set the following for each program:

- · Day number
- · The number of daily runs

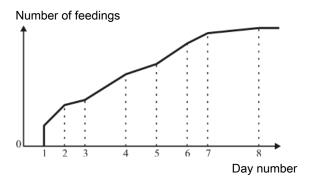


Figure 7: Chain feeding: Number of feedings per day.

The number of daily feedings gradually increases between two day numbers.




Figure 8: Chain feeding: Example 1: Distribution of the number of feedings

The number of feedings is distributed equally between the number of starts. Excess feedings are distributed from the last start.




Figure 9: Chain feeding: Example 2: Distribution of the number of feedings

If the number of feedings is less than the number of starts, feeding is carried out once at each start until the set number of feedings is reached.

Operation Program	overview card Feed settings
Chain last start time	Display of the latest chain start.
Chain next start time	You can set a manual chain start if you want to change the start time with in relation to the feed program.
	The controller postpones the chain start if the cross auger hoppers are not full.
Total number of chain starts today	Display of the calculated number of chain starts for the current day. The number gradually increases between two day numbers.
Total number. of chain starts yesterday	Display of the total number of chain starts yesterday compared with the number of the current day.
Number of chain runs to- day	Setting several chain runs for the current day.
	The number of chain runs is otherwise set in the feed program. The following days will proceed using the same offset.
	If this number is higher than the calculated number of chain runs, there are too many runs compared to the length of the period.
Number of chain runs to- day calculated	Display of the number of chain runs that can be applied within the periods.
Number of chain runs offset	Display of the offset compared to the number of feedings set in the program.
Chain runtime	Setting the runtime for one chain rotation. It is important to set this parameter correctly.
Manual chain start	Activation of manual feeding.
	A manual start can be activated before and after the programmed feedings. It will not affect subsequent feedings.

5.3.4.4 Feed mixture

When a drum weigher or FW 9940-2 is used, the controller can handle feed mixtures of up to 5 types of feed.



Operation | Program overview card | Feed settings | Feed mixture

The feed mixture can be adjusted with an offset without changing the feed mixture curve. The proportion of feed B, C, D, and E is adjusted according to the current curve value.

By subtracting the offset value from **Current**, it is possible to reset the offset and return to the original curve value.



Menu button | Strategy | Feed | Feed mixture

A mixing program with 8 programs controls the mixture of different feed types.

Enter the desired quantity in percent of feeds B, C, D, and E. The controller then calculates the amount of feed automatically.

The controller changes the mix proportion continuously, from day to day, to prevent sudden changes in the feed composition.

One offset is added to the feed mixture curve. If very high offset values have been set, **Feed X today** may, in time (when the curve rises and falls) exceed 100% or fall below 0%. In that case, the **Feed X today** value should be corrected. However, the controller will always calculate the correct mix proportion.



Type of feed when feed mixing is stopped

Catching. Displaying the type of feed selected for the transition to Catching. See also the Catching section.

5.3.5 Feed weigher



Operation | Program overview card | Feeding | Feed weigher


The controller provides information about the filling of the weigher and the current status of the weigher.

5.4 Water



Operation. A graphic on the **Production results** card shows the current average water consumption for the last 48 hours (14 days for breeder).

In the following section, you will see a description of the functions and recording options available for water.

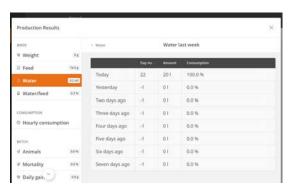

Operation | Production results card | O Water

Water data is collected and presented in graphs and outlines, including important key figures.

The controller records the water consumption in liters to provide a complete overview. The water consumption is also recorded in percent to make sudden changes visible.

Under normal conditions, the percentages will increase by a few percent per day as the age of the animals increases.

Operation Program overview card Water settings (only in case of water control)	
Water status	Displays whether the controller has turned the water on or off.
	When setting up water alarms, it is possible to choose whether the water should be turned on or off when an alarm is generated.
Water amount this period	Display of water consumption in the current period.
Water target amount	Display of the maximum amount of water the animals are allowed to consume in the current period.
Water reference	Display of the water consumption target per animal in the current period.

Water level alarms

The water level alarm is used to monitor the water level to ensure that there are no breaks on the drinking lines. It quickly shows water supply errors, such as blockage, broken water pipes, or lack of water supply. The primary purpose is thus to ensure a stable water supply for the animals. See also the section Water alarms [\triangleright 61].



Input terminals in alarm mode are displayed at the top of the list. Next, the faulty input terminals are displayed, which are monitored before an alarm is released. At the bottom of the list, you find the input terminals where the status is OK.

Water level alarms	Display of the current water level alarms.
	The list is sorted continuously according to the status of the input terminals (Critical , High ,
	Low, OK).
Enable/disable individ- ual water level alarm	Connection and disconnection of the alarm for each water level input.

5.4.1 Water control

The controller has 4 types of water control:

- · Time controlled according to the program
- Time controlled according to the lighting program
- · Time and amount controlled according to the program
- · Time and amount controlled according to the lighting program

In the case of time and amount controlled water, the controller turns off the water when the desired amount has been consumed.

It is also relevant to install water control to draw attention to alarms to quickly monitor leakages and blockages in the water system.


In principle, water control works as feed control. The water program can contain up to 16 programs starting on different day numbers. A program is maintained from one day number to the next day number. If no programs have a higher day number, the program applies to the rest of the batch.

Set for each day number (up to 16):

- · Number of periods per day
- · Start and stop time

Please note that:

- During the time up to the first day number, the water supply is open all the time.
- · That there is no access to water outside the periods selected.
- If a start time is set from 00:00 to 24:00, water is available around the clock.

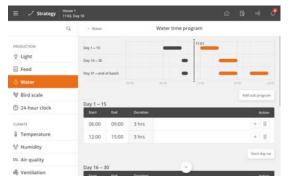

Water time program

Menu button | Strategy | O Water | Water time program

Press the field in the column **Start** to change the start time.

Press the field in the column **End** to change the stop time.

The blocks on the timeline show when and how long the water is available.


Press to add a new period.

Press the **Start day number** field to change the day number on which the program begins, if necessary.

Press the **Add subprogram** to create a new program starting with another day number.

Press to delete a period.



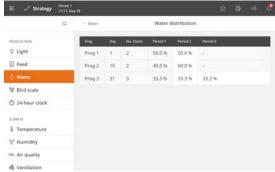



Water reference curve



The available water quantity is determined in a water reference curve.

Water distribution by periods

Menu button | Strategy | Water | Water distribution

Several starts for each program are set in the water programs.

The desired amount of water on the day (as indicated in the reference curve) can be divided between the number of starts (periods).

If a period changes, the controller automatically adjusts the following values. Therefore, make the changes so they follow the periods' sequence.

Water level

When a sensor detects that the water level is not within the desired range, the state of this sensor is displayed at the top of the list.

From the factory the alarm is set to send a warning after one minute. See also the section Water alarms [61].

5.5 Light

Among other things, the light can be used to adjust the animals' behavior during the day as increased light intensity increases the activity and decreased light intensity decreases the activity.

The controller has 3 types of program-controlled light:

- · Main light
- · Slave light
- · Extra light

And inspection light which is manually controlled (by add-on software).

Each type of light has various settings options depending on how the light is installed and set up.

	Mode	Program	Light intensity
Main	Standard (dimmer)	Yes	Dawn/dusk
		Reduced main light	Fixed level
	Flexible (dimmer)	Yes	Up to 30 points a day
	Standard (ON/OFF)	Yes	No
Slave	Standard (dimmer)	No. Offset to main	Dawn/dusk
	Standard (ON/OFF)	No. Offset to main	No
Auxiliary	Flexible	Yes	Up to 30 points a day
Inspection	Manual (automatic stop)	No	Fixed level



Operation. When the light is on, it is displayed with a colored icon on the card Program overview.

The card provides access to view and change the program which is active on the day number.

5.5.1 Light program

In principle, the light control works as feed control.


The light program can contain up to 16 programs starting on different days numbers. A program is maintained from one day number to the next day number. If no programs have a higher day number, the program applies to the rest of the batch.

Set for each day number (up to 16):

- · Number of periods per day
- · Start and stop time

Please note that:

- The light up to the first day number is on 24 hours a day with the same light intensity as for Day 1.
- · That there is no access to light outside the periods selected.
- Light is available around the clock if a start time is set from 00:00 to 24:00.

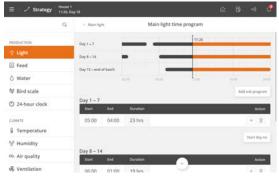



Press the field in the column **Start** to change the start time.

Press the field in the column **End** to change the stop time.

Press to add a new period and set the start and stop time.

Press the field **Start day no.** to change the day number of the period, if required.

Press Add subprogram to add a new day number.

The blocks on the timeline show when and how long the light is on.

Press to delete a period.

5.5.2 Main light

 \Diamond

The controller has 2 types of main light:

- Standard same light intensity all day (but with reduced light, and dawn and dusk options)
- · Flexible different light intensities during periods of the day

Operation Program overview card Main light settings	
Main light intensity set- point	The setting of light intensity for the main light (with light dimmer).
Main light off intensity	The setting of minimum light intensity (with light dimmer).
setpoint	The setting of light intensity when the lighting program is OFF.
Main light sensor value	Reading of the current light intensity measured by the light sensor (with light sensor). When there are more sensors, the controller shows an average value.
Light sensor history	Graphic display of the history curve values in different time intervals from 24 hours to 2 months.
Reduce main light	Reading of whether the reduction of the main light is ON or OFF. See section Reducing main light [48].

Menu button Strategy Light		
Main light time program	The controller automatically regulates the light in the house based on the values you indicate in the Light time program menu.	
	The time program is set as described in the section Light program [▶ 45].	
Light intensity relative to setpoint (Only at flexible light)	The setting of the light intensity in percent relative to 100% light intensity during periods of the day. See section Flexible light settings [\$\ni\$ 48].	
Main light intensity curve	The setting of the light intensity of each day number.	
Dusk and dawn (Only at standard)	Settings of periods with increasing and decreasing light intensity for transition between light and darkness in the house. See also the Dawn and dusk [* 47] section. Only available in houses with light dimmers.	
Settings for flexible main	Menu for setting light programs.	
light (only at flexible)	The controller automatically regulates the light in the livestock house based on the values you indicate in the menu.	
	The program is set as described in the section Flexible light settings [▶ 48].	




Please note that there may be correlation between feather pecking, injury, mortality and the light intensity in the house.

5.5.3 Dawn and dusk

The function is intended for houses with standard lighting control.

When a light dimmer is used, the light level can be controlled so that a light period starts with "Dawn" where the light is changed from "Night" to "Day". Similarly, a light period ends with "Dusk".

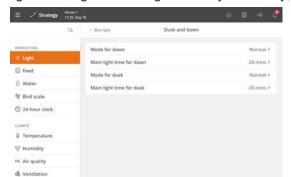

Over a set period, the controller changes the light to the required level.

Periods for dawn and dusk can be set independently.

Set the duration of the individual periods and the value of the light intensity when the period expires.


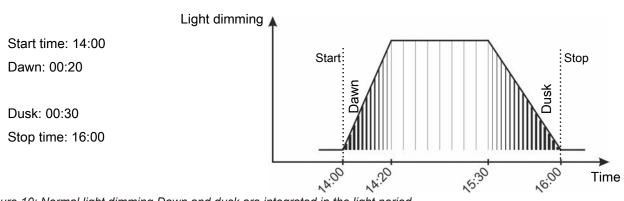


Figure 10: Normal light dimming Dawn and dusk are integrated in the light period.


5.5.3.1 Dawn and dusk - advanced

The dawn and dust periods can follow a selected sequence of time, independently of each other: **Normal** or **Advanced**.

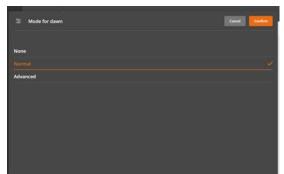


Normal: Over a set period, the controller changes the light to the required level

Advanced: Over three periods, the controller changes the light to the required level.

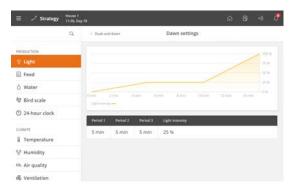

Advanced

Set the duration of the individual periods as well as the value of the light intensity when the period expires.



Light control Catching. See also the section Catching.

Selection of activation/deactivation of the different light types at catching.


Display of the status for catching light.

5.5.4 Reducing main light

The function is intended for houses with standard lighting control. Changing the light level for a period every 24 hours can contribute to regulating the behavior of the animals. A lower light level would thus make the animals calmer.

Operation | Program overview card | Reduce main light

Reduce main light state Reading of whether the reduction of the main light is ON or OFF.

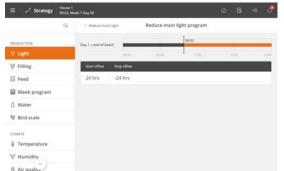

Start offset and Stop offset must be within the ON time of the light program.

Menu button Strategy 🌣 Light Main light Reduce main light		
Start offset	The light reduction starts after the lighting program has started. Setting how long after.	
Stop offset	The light reduction stops before the lighting program stops. Setting how long before.	
Reduce main light program	Setting the light reduction according to the main light program.	
Reduce main light intensity to	Setting the light intensity level to which the main light should be reduced.	
Time to reduce main light		
Time to return to main	until the light intensity is back to the normal level.	

5.5.5 Flexible light settings

When the light control is set to **Flexible**, the light intensity can be adjusted within the on period(s) with up to 30 points and can be adjusted in percent compared to 100% light intensity for periods during the day.



It may be advantageous to start by setting a start and a stop time where the light intensity is 0% to limit the light on period. Then you can set the individual time periods where the light intensity should deviate from 100%.

Create a light program. See section Light program [▶ 45].



Operation | Program overview card | Main light

Press the field **Time** to set the time.

Press the field **Light intensity relative to setpoint** to set the light intensity at this time.

Press to add a point in the program.

Press to delete a time/point.



The feed program is visible on the card at layer feeding with feed program. Thus, you can choose to adjust the light intensity according to the feeding times.

5.5.6 Slave light

Slave light is a function that is activated offset from the main light. In addition to an alternative light source, for example, curtains that blind the windows.

The offset can be set with a start and stop offset for each slave light.

Slave light 1 intensity setpoint Changing the light intensity according to the program. Slave light 1 off intensity Setting of minimum light intensity (with light dimmer). Slave light 1 off intensity Setting of minimum light intensity (with light dimmer). Changing the light intensity when the lighting program is OFF if you want to change

the light intensity according to the program.

Menu button Strategy 🌣 Light Slave light		
Slave light 1 time pro- gram	Setting the Start offset and Stop offset program for when the slave light is on in relation to the main light.	
	The offset can be set as a positive or negative value, depending on whether the slave light should switch on before or after the main light.	
Slave light 1 intensity curve	Setting the light intensity curve for slave light.	
Start offset relates to	Setting if the slave light should switch on with an offset to Start time or Stop time settings in the light program.	
Start offset to when Main light turns on	Setting of curve point for Start offset in the slave light program.	
Stop offset relates to	Setting if the slave light should switch off with an offset to the settings of Start time or Stop time in the light program.	
Stop offset to when Main light turns off	Setting of curve point for Stop offset in the slave light program.	

Dusk and dawnSettings of periods with increasing and decreasing light intensity for transition between light and darkness in the house. See also the section Dawn and dusk [▶ 47]. Only available in houses with light dimmers.


When a light dimmer for the slave light is used, the **Light intensity**, **Light OFF intensity** and **Light intensity off-set** settings function as described for main light.



The main light program is shown above the slave light program in the menu.

5.5.7 Extra light

Among other things, extra light can be used to, for example, control light according to a separate light program in specific parts of the livestock house. Extra light has the same settings options as the flexible main light, see Flexible light settings [> 48].

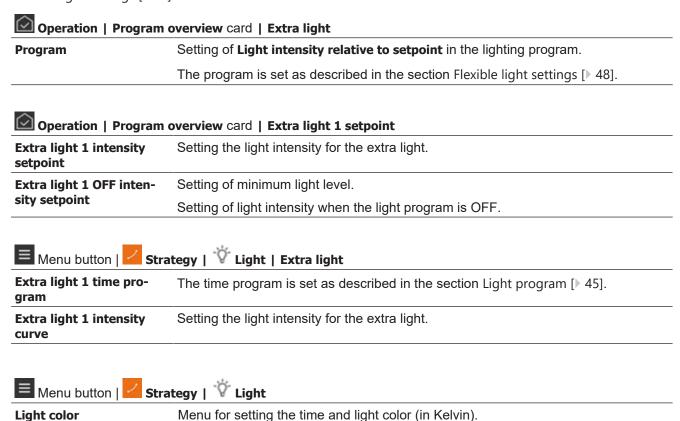

5.5.8 Inspection light

The inspection light is used to control the light when entering the house. The light is controlled through a menu button or an external push button.

the values you set in the menu **Light color program**.

The controller automatically adjusts the light color in the livestock house based on

All types of light can be used as an inspection light (main light, slave light, and extra light).

Operation \bigcirc Inspection	
Duration	Setting for how long the inspection light should be on.
	The light automatically returns to normal light after the set period.
active	Activation of the inspection light.
	When the inspection light is on, it is displayed with a colored icon.
light intensity	Setting the light intensity of the inspection light.

5.6 Silo

To monitor the feed consumption, it is important to know how much feed is filled into the silos. The quantity of feed delivered can be recorded manually or automatically in the controller. In the case of electronic silo weighing, the recording of the delivered feed quantity is automatic.

The controller receives data from the feed weigher to determine the amount of feed consumed from each silo and calculates the feed consumption accordingly.






The silo card on the operation page shows the current silo content, feed type, and number of days until the silo is calculated to be empty.

The graphic shows in a green color from which silo feed is being taken (is active) and in colors how much food is left. The color changes and reflects the alarm levels according to when the silo is empty. A gray color shows an inactive silo.

The silo card provides access to the silo settings.

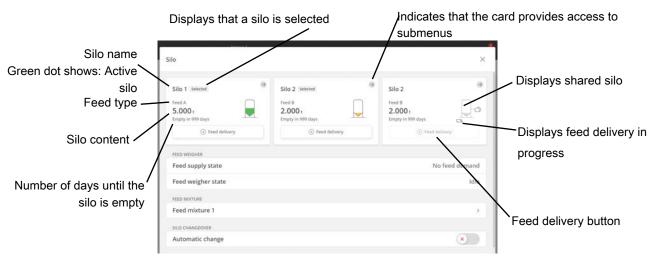

The silo card shows the status of each silo and collects relevant information and settings.

Operation Silo card	· · · · · · · · · · · · · · · · · · ·
Feed delivery	Enter the delivered quantity of feed.
Feed type	Selection of the delivered feed type.
Operation Silo card	→ Silo card
Feed type	Selection of the feed type contained in the silo.
	Each type of feed can be named to match the content of the silo - e.g. growing feed (under Strategy Feed Feed type names).
Current content	Manual entry feed amount in silo.
	The user can change the current silo content. The function is most often used to ensure that the controller records an empty silo to have a silo content of 0.
	If there is a difference in the silo content displayed, it can also be corrected here.
Feed delivery log	Delivery log with the amount and date for each delivery of feed.
	Up to twenty deliveries can be stored for each silo.
Other information	At more than 1 silo with the same feed type
	Display whether the silo is selected or not.

	Access to manual selection of a different silo.
Silo	Manual mode.
	Normally the controller must be set to automatic control. During start up, or in a service situation, it may however be convenient to control the individual functions manually.
	After the manual operation, you must set the function back to automatic control, so that the controller continues to operate as before.
Silo empty sensor state	Indication of whether the sensor detects feed.



In connection with electronic silo weighing:

It may lead to inaccuracies when the feeding system is running and at the same time feed is being delivered to a silo that supplies feed to the feeding system. It should therefore be avoided.

If feed is still supplied to the silo while the feeding system is running, the controller will stop the feeding during delivery when using pan and destination feeding.

When using layer and chain feeding, the controller uses the experience from normal feedings to calculate the correct delivery amount and the feed consumption.

5.6.1 Change to different silo

When a silo runs out of feed, the system can automatically change to another silo that has either the same or different feed type (not for destination feeding).

When setting up the silos, select how the change is to be made. The feed type contained in the silos can be changed directly via the silo card.

When automatic change is used, it may be advantageous to name the feed types in the silos. See section Naming of feed type [> 34].

Change to a silo with different or the same feed type

This silo setup is used when you have several feed types and want to know the consumption of each feed type.

Operation Silo card Feed replacement Feed replacement status			
Changeover	Displays whether one feed type is currently replaced by another feed type when changing to another silo.		
	The controller gives a soft alarm when it changes to a different silo.		
Reset	Resetting the change to another silo.		
	If the silo has gone empty by mistake and changed to another silo, it is possible to manually change back when feed has been delivered again.		
Operation Silo card	Operation Silo card Changeover		
Gradual changeover	The controller can gradually change to a different silo.		
	Setting the quantity of residual feed at which the gradual transition is to start. See section Change to different silo [> 53].		
Time before changeover	Setting the time before the automatic change of silos occurs.		
Minimum silo content be- fore change	The controller considers a silo empty when the quantity of feed is lower than the setting, and the silo auger does not deliver feed to the weigher. It compensates for inaccuracies in the delivery data entered and at the feed weigher.		
	If a silo is emptied and the quantity of feed in the silo overview is higher than the Minimum silo content , the production controller cannot automatically change. The quantity must therefore be changed to 0,000 tons for it to be able to make an automatic change.		
Menu button Strategy			

Change to silo with the same feed type

Operation Silo card Changeover	
Automatic change	Setting whether the controller is to change automatically to a different silo with the same type of feed when the active silo is empty.
Gradual changeover	The controller can gradually change to a different silo.
	Setting the quantity of residual feed at which the gradual transition is to start. See section Change to different silo [> 53].
Time before changeover	Setting the time before the automatic change of silos occurs.
Minimum silo content be- fore change	The controller considers a silo empty when the quantity of feed is lower than the setting, and the silo auger does not deliver feed to the weigher. It compensates for inaccuracies in the delivery data entered and at the feed weigher.
	If a silo is emptied and the quantity of feed in the silo overview is higher than the Minimum silo content , the production controller cannot automatically change. The quantity must therefore be changed to 0,000 tons for it to be able to make an automatic change.

The controller makes the change between the 2 silos gradually (applies only to drum weigher and FW 9940-2).

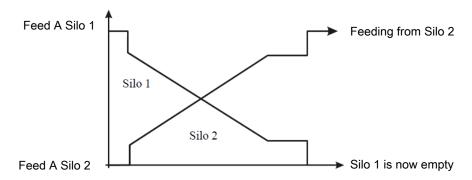


Figure 11: When the content of the silo reaches a set amount, the gradual transition to another silo starts.


If another silo with the sufficient quantity of feed is not available, the production controller will display an alarm: No feed for feed weigher. See also section Feed alarms [> 58].

5.6.2 Shared silo

A Shared silo is used, for example, where several houses with separate feed weighers are supplied with feed from one silo.



When a silo is shared between several houses, it is regulated by a master controller. Select the master controller and the client controllers during installation.



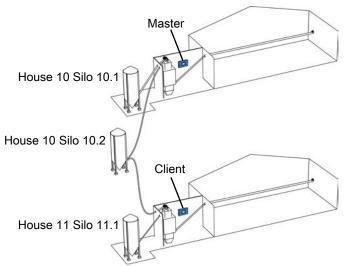


Figure 12: Example of silo shared between two houses with controllers on LAN.

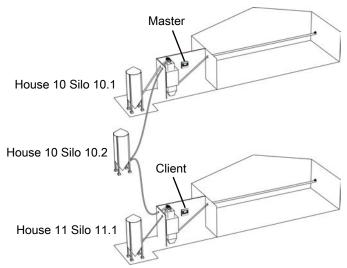


Figure 13: Example of silo shared between two houses with controllers on LAN.

A shared silo has the following values in common with the master controller:

Operation Silo card	1
Feed type	Display of the selected feed type.
	Please note that feed type names are not shared. If the name of a feed type is changed, it must be corrected in both the master and client controller (Strategy menu).
Current content	Display of the current silo content.
	The controller automatically reduces the silo content with an amount corresponding to the animals' feed consumption.
	On the master controller , the value can be changed.
Feed delivery log	The feed delivery log is only available on the master controller.
	Display the amount and date of each feed delivery.
	The delivered feed amount is entered in the master controller.

See also the section Silo [▶ 52].

5.6.3 Day silo – feed weighing

A day silo can be used in large feeding systems to ensure that there is enough feed and prevent the system running out of feed during feeding.

Filling can be performed automatically according to a filling program or manually once.

The day silo will not be filled during feeding or when feeding is paused.

Operation Program overview card Fee	ding Day silo
---	-----------------

Day silo content Reading the current feed amount in the day silo.

Menu button | Strategy | Day silo

Max. capacity Setting the maximum kilos of feed needed to fill the day silo.

The value is the basis for the displayed percentages, e.g., Filling amount.

The amount of feed to be filled into the day silo is set for each feeding in the feed program. If possible, it is filled immediately after feeding, so it is ready for the next feeding.

Please note that it may be necessary to adjust the filling amount if changes are made to the feed program. See the section Feed programs [> 35].

5.6.3.1 Filling of day silo

Menu button St	rategy 🛱 Day silo Filling
Filling amount	Setting in percent of the maximum amount to be filled into the day silo.
Filling amount	Reading of the filling amount in kilos.

Menu button Strategy Day silo Feed mixture	
Feed type	Setting the feed type to use for the filling.
Mixer time	Setting the time the feed mixer is to run after filling.
	For automatic refilling, a mixing time can be set for each filling in the program.
Start filling of day silo	Manual start and stop of filling. Filling runs until the set filling amount is reached.

5.7 24-hour clock

The 24-hour clock function allows you to automatically turn on and off equipment at specific times or time intervals. In addition, the 24-hour clock allows you to choose how often equipment will run in a week. It is done by applying a week program.



Operation. When 24-hour clock is on, it is displayed with a colored icon on the card **Program overview**.

The card provides access to view and change the programs of all the 24-hour clocks.

In each program you must set the following:

- · Start time
- Duration



Operation | Program overview-card | Clock

Press the field in the column Start to set a start time.

Press the field in the column **Duration** to set the duration of the period.


Press to add a new period, then set the start time and duration of the period.

The blocks on the timeline show when and how long the 24-hour clock is on.

Outside the selected periods, the 24-hour clock is off.

Press to delete a period.

24-hour clock with week program

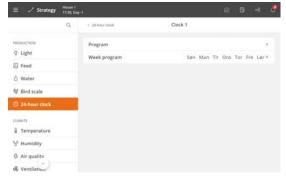



Select which days the 24-hour clock is on.



Figure 14: If an ON-time runs past midnight on a day when the 24-hour clock is not active, the function will remain ON until the time has elapsed.

6 Alarm settings

The controller has a number of alarms, which it will activate if a technical error occurs or alarm limits are exceeded. A few of the alarms are always connected, e.g. power failure. The other alarms can be activated / deactivated, and for some of them, you can even set the alarm limits.



The user is always responsible for ensuring that all alarm settings are correct.

See also the section Alarms [25].

6.1 Production

6.1.1 Light alarms

The controller has light alarms for the light sensor, main light, slave light, and extra light.

When the light alarm is active, light is not regulated according to light sensors, if any.

Menu button Settings Alarms Production Light	
Light sensors deviation limit ±	If more light sensors are connected to the same light source (main/slave/extra light), the controller will generate an alarm if the difference in light intensity is too big at the sensors (+/-20 lux).
Alarm delay	Setting a delay for all light alarms to prevent unintended alarms in connection with brief light changes.
Alarm limit	Setting of alarm limit.
	The controller generates the light alarm if the light intensity deviates (+/-20 lux) from the required level.

6.1.2 Feed alarms	
Menu button Set	tings 🗘 Alarms production Feed Feed weigher
No feed to feed weigher	The alarm is triggered when the feed weigher determines that no feed is coming from the silos. The function can be connected and disconnected.
	In the event of an alarm, the controller deactivates the silo auger.
	Set how much time shall pass before the controller triggers an alarm in Time before alarm .
	The alarm remains active until the feed weigher can register feed again.
	When the alarm is acknowledged, the silo auger starts again.
	It is possible to set the silo auger to run and stop alternately for shorter periods after the alarm has been acknowledged. When the silo auger is pumping, feeding may start again if the stop was due to a bridge formation in the silo.
	The pump function can be overridden by setting the Stop time silo auger to 0 minutes. This way, the controller will ensure that the silo auger stays turned off until the feed demand sensor is manually removed and reconnected. The controllers will then activate the silo auger once in the set runtime (Runtime silo auger).
Missing feed type	One of the feed components included in the mixing program is not available in any of the silos.
	Check the status of silos and change type of feed in the controller, as required.
Feed weigher can not	Feed cannot be discharged from the weigher.
empty	As for the drum weigher, the drum cannot turn nor can the stop position be found.

Feed weigher calibration	The calibration of the feed weigher was not finished within the set period of time.
Feed weigher not stable	The feed weigher cannot carry out a stable weighing process. Vibrations may cause this.
Feed weigher reference voltage	The controller recorded that the reference signal from the weigher is less than 9.0V in a given period of time.
Feed weigher hopper not	At feed weigher shared between several houses via network.
empty	The feed weigher could not empty feed below the feed weigher.
	Check the empty sensor of the feed weigher and the stop sensor of the cross auger.
Feed shutter incorrect position	At feed weigher shared between several houses via mechanical distribution shutter.
	The weigher wants to change to the other house, but the distribution shutter does not react.
Cross auger alarm	The controller triggers an alarm if it cannot fill the cross auger hopper back up before the stated alarm time (Time before alarm). The controller stops the feeding system to avoid overfilling of feed.
	In the case of pan feeding, Stop feed system if cross auger empty in the menu Adjustment must be set to a time shorter than the alarm time for the cross auger.
Not enough feed (not in the case of chain	The alarm is generated if the consumption of feed is lower than indicated in the period of time selected (Check interval)
feeding)	It can be disconnected automatically during the first days of a batch. The alarm is active only during a feeding period.
Too much feed	The alarm continuously monitors whether too much feed is supplied to the house within a time interval.
	A system can supply a certain quantity of feed within a period, depending on the size of supply augers and cross augers.
	Instructions for setting the alarm limits:
	Find the maximum quantity of supplied feed in the feed reference (Day 42, broilers).
	 Maximum feed quantity = 207 g.
	Multiply the maximum amount of feed by the number of animals in the house.
	• 207 g x 45,000 animals
	Divide by 1,000 to get the consumption in kg (consumption per 24 hours). • 207 x 45,000 x / 1,000 = 9,315 kg
	The recommended alarm limit is set based on consumption per 24 hours x 2.5. • 9,315 kg x 2.5 = 23,288
	Calculate consumption per minute.
	Alarm limit = Consumption per 24 hours x 2.5 / (minutes per day) = consumption in kg/min.
	 9,315 x 2.5 / (24 hours x 60 minutes) = 16.2 kg/min.
	Check interval is set to 45 minutes.
	The alarm is triggered if feed consumption during the 45 minutes exceeds Feed consumption within the control interval.
	• 16.2 kg x 45 minutes = 727 kg
	Remember if the check interval is changed, the alarm limit must be recalculated with the new check interval.

	If the alarm is generated and no error has occurred, monitoring time should be increased to,e.g., 1 hour.
	The alarm can be disconnected automatically at the start of a batch by setting a start day.
Feed consumption decreased	The alarm can be disconnected automatically at the start of a batch by setting a Start day .
	The alarm continuously compares the previous 24 hours with the current 24 hours and generates an alarm if consumption deviates by more than the set percentage.
Not enough feed at start (pan and chain feeding)	The alarm must ensure that the feeding system is in order when feeding restarts after a stop.
(pair and chair leeding)	As a main rule, the alarm limit should be set to 10 kg (Feed consumption in given check time).
	For chain feeding, monitoring time may not exceed the time for a chain rotation.
	An alarm is generated if consumption at the start of a feeding period (or at the start of chain feeding) is lower than indicated in the period of time selected (Time for alarm check).
	Can be disconnected automatically during the first days of a batch (Begin to check at day number).
Too much feed after stop (pan and chain feeding)	The controller monitors whether too much feed has been put through the feed weigher after a feeding period has ended (pan feeding) or the chain has been run through once. Too high a water consumption can indicate that something is wrong.
	The cross auger hoppers will be filled up at the end of a feed. The type of hoppers, and how much they are filled up before feeding stops, determines how much feed is used in refilling.
	An alarm is triggered if consumption after a feed period (or when chain feeding stops) is higher than the set value (Max. feed consumption after stop).
Water feed ratio (pan and chain feeding	The alarm indicates that the water/ feed ratio does not follow the reference curve. Possible reasons:
with water meter)	1) Defective water system
	2) Sick animals
	3) Feed inaccuracies
	However, note that the water/ feed ratio may be increased in houses without cooling systems when the outside temperature is high.
	The alarm is generated if the water and feed consumption ratio within a given period of time (Time for alarm control) deviates from the value set (Water/feed ratio alarm limit).
	Can be disconnected automatically during the first days of a batch (Begin to check at day number).
	Choose whether the water is to turn off when an alarm is generated. When all water alarms have been acknowledged, the controller turns on the water again.
Feed level too low	Based on the feed consumption of the previous day, the controller calculates how long it will be until the feed is consumed and will trigger an alarm once this time is exceeded(Feed level too low).
	A total overall level will be calculated if the same type of feed is in multiple silos.

Silo content | Feed level too low

Low feed X level limit	
Feed level too low	The displayed silo content is a calculated value.
	The alarm is generated when the feed amount in a silo is below a set limit.

Silo is empty alarm	The empty silo sensor records that there is no more feed in the silo, and it is impossible to switch to another silo, possibly due to too low silo content.
Calibration of silo	
Calibration of silo	The controller will give an alarm if the calibration is not completed within the set time (1 hour).
	As long as the silo weigher is set for calibration, it cannot be used by the feeding system.
Silo is not calibrated	The controller will give a soft alarm if the electronic silo/day silo is not calibrated after installation. The silo must be calibrated to show the correct data.

Feed type replacement alarm

Feed X replacement	The alarm indicates that one silo has gone empty, and therefore, feed is automatically taken from another silo. See also the section Change to different silo [▶ 53].
Day silo content (layer feeding)	The alarm indicates that the content of the day silo is too low (below a set limit) during feeding.
	The feeding is paused.
	Check that the filling amount for the day silo is sufficient in relation to the current feed consumption.
	Start filling the day silo in the menu Production Day silo Manual filling of day silo or stop the feeding allowing the feeding system to refill automatically at the next feeding.

6.1.3 Water alarms

These alarms can be disconnected automatically at batch/flock start by setting a **Start alarm day**.

Menu button Setting	s \bigcirc Alarms Production Water		
Min. and max. water alarm	The alarms are used for monitoring the animals' drinking patterns.		
	The alarm limits for maximum and minimum water consumption is a set percentage of the normal consumption.		
	The controller calculates the normal consumption by comparing the current 24-hour period with the 24-hour period that is two hours older. At 1 P.M., for example, you look at the period from 11 A.M. on the previous day to 11 A.M. on the current day.		
	Choose whether the water is to turn off when an alarm is generated. When all water alarms have been acknowledged, the house controller turns on the water again.		
	With water control		
	These alarms are used for monitoring leakages and stoppages in the water system.		
Not enough water	The alarm is triggered if the water consumption measured by a water meter is too low during a given period of time.		
	It is recommended to set this alarm to 1.0 l/min. and a monitoring time to 30 minutes. An alarm will be generated if consumption is lower than 30 liters each half hour.		

Too much water alarm when open	The alarm is triggered if the water consumption measured by a water meter is too high in a given period.		
	Depending on the capacity of the water supply, the system can supply a certain quantity of water per unit of time.		
	The alarm is triggered when the system has operated at maximum output for too long.		
	If a water relay is installed, the water will be turned off at excessive water consumption.		
	Guidelines for alarm limit settings:		
	Measure the amount of water flowing per minute to the current water meter. Set the alarm limit for 1 liter less than the measured. Set the monitoring time to 30 minutes.		
Too much water alarm when closed	The alarm monitors whether the water system is turned off when it should be.		
	The recommended setpoint for this alarm is 0.1 l/min. and a monitoring period of 30 minutes.		
Water level alarm	Setting the time before alarm.		
	The controller does not trigger an alarm until the water level has been recorded as OFF during this time (15 min). It ensures that brief changes in the water level of the livestock house do not trigger the alarm.		
	The controller does not change the regulation at the water level alarm.		
Start alarm on day	Automatic disconnection at the beginning of a batch/flock. To avoid triggering false alarms, you can indicate how many days should pass before the controller triggers a water alarm.		
Water level alarm	The alarm monitors if the water level is sufficient. If the water level is not suffi-		
(only layer feeding with DOL 100 water)	cient for more than 15 minutes (factory setting), it generates an alarm.		
	See the menu Production Water Water level alarms to see on which input terminals there is an alarm.		

Water consumption per 24-hours


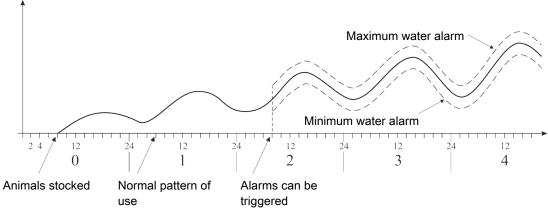


Figure 15: Example of minimum and maximum water alarm

The controller triggers an alarm when the limit for maximum water consumption is exceeded or the consumption is below the limit for minimum water consumption.



There may be various reasons for the fluctuation in the animals' water consumption that will all trigger an alarm. For example, an alarm may be triggered due to stocking more animals or the slaughter of some animals, an outbreak of disease in the livestock or a rupture of the water pipe.

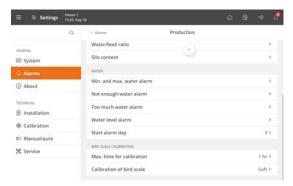

Start alarm on day

In the event of major changes to the number of animals in the house, at least 26 hours should pass before the controller can trigger the alarm.

To avoid triggering false alarms, you can indicate how many days should pass before the controller triggers a water alarm.

6.1.4 EggScan - egg counter



Time before alarm - EggScan Setting the time before alarm.

The controller triggers an alarm in the event of an error on one or more of the connected egg counters.

See also the menu Technical | Service | Installation.

6.2 Master/Client alarms

If the controller is set up to share equipment with other controllers, it gives an alarm if the connection between the controllers is lost. A 'Client' controller will continue to regulate according to the latest received value from the 'Master' controller equipment until the network connection is restored.



7 Maintenance instructions


The controller requires no maintenance to function correctly.

You should test the alarm system every week.

Use only original spare parts.

Note that the service life of the controller will be extended if it stays connected all the time, as this will keep it dry and free from condensation.

Lock screen for cleaning

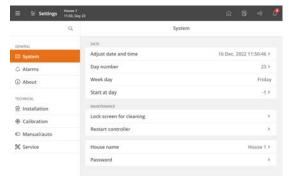

When the controller is to be cleaned, it is possible to lock the screen to avoid inadvertent operation during cleaning.



Press Menu button | Settings | General | System | Maintenance | Lock screen for cleaning to lock the screen.

Press and hold for 5 seconds to unlock the screen.

The controller automatically cancels the lock after 15 minutes.

7.1 Cleaning



Clean the product with a cloth that has been wrung out almost dry in water and avoid using:

- · high-pressure cleaner
- · solvents
- · corrosive/caustic agents

We recommend to calibrate bird scales at least once per batch. See also the Technical Manual.

7.2 Recycling/Disposal



The label indicates that the product must not be disposed of as general refuse disposal and must be treated as electronic waste.



The label indicates that the product is suitable for recycling.

It must be possible for customers to deliver the products to local collection sites/recycling stations in accordance with local instructions. The recycling station will then arrange for further transport to a certified plant for reuse, recovery and recycling.

